
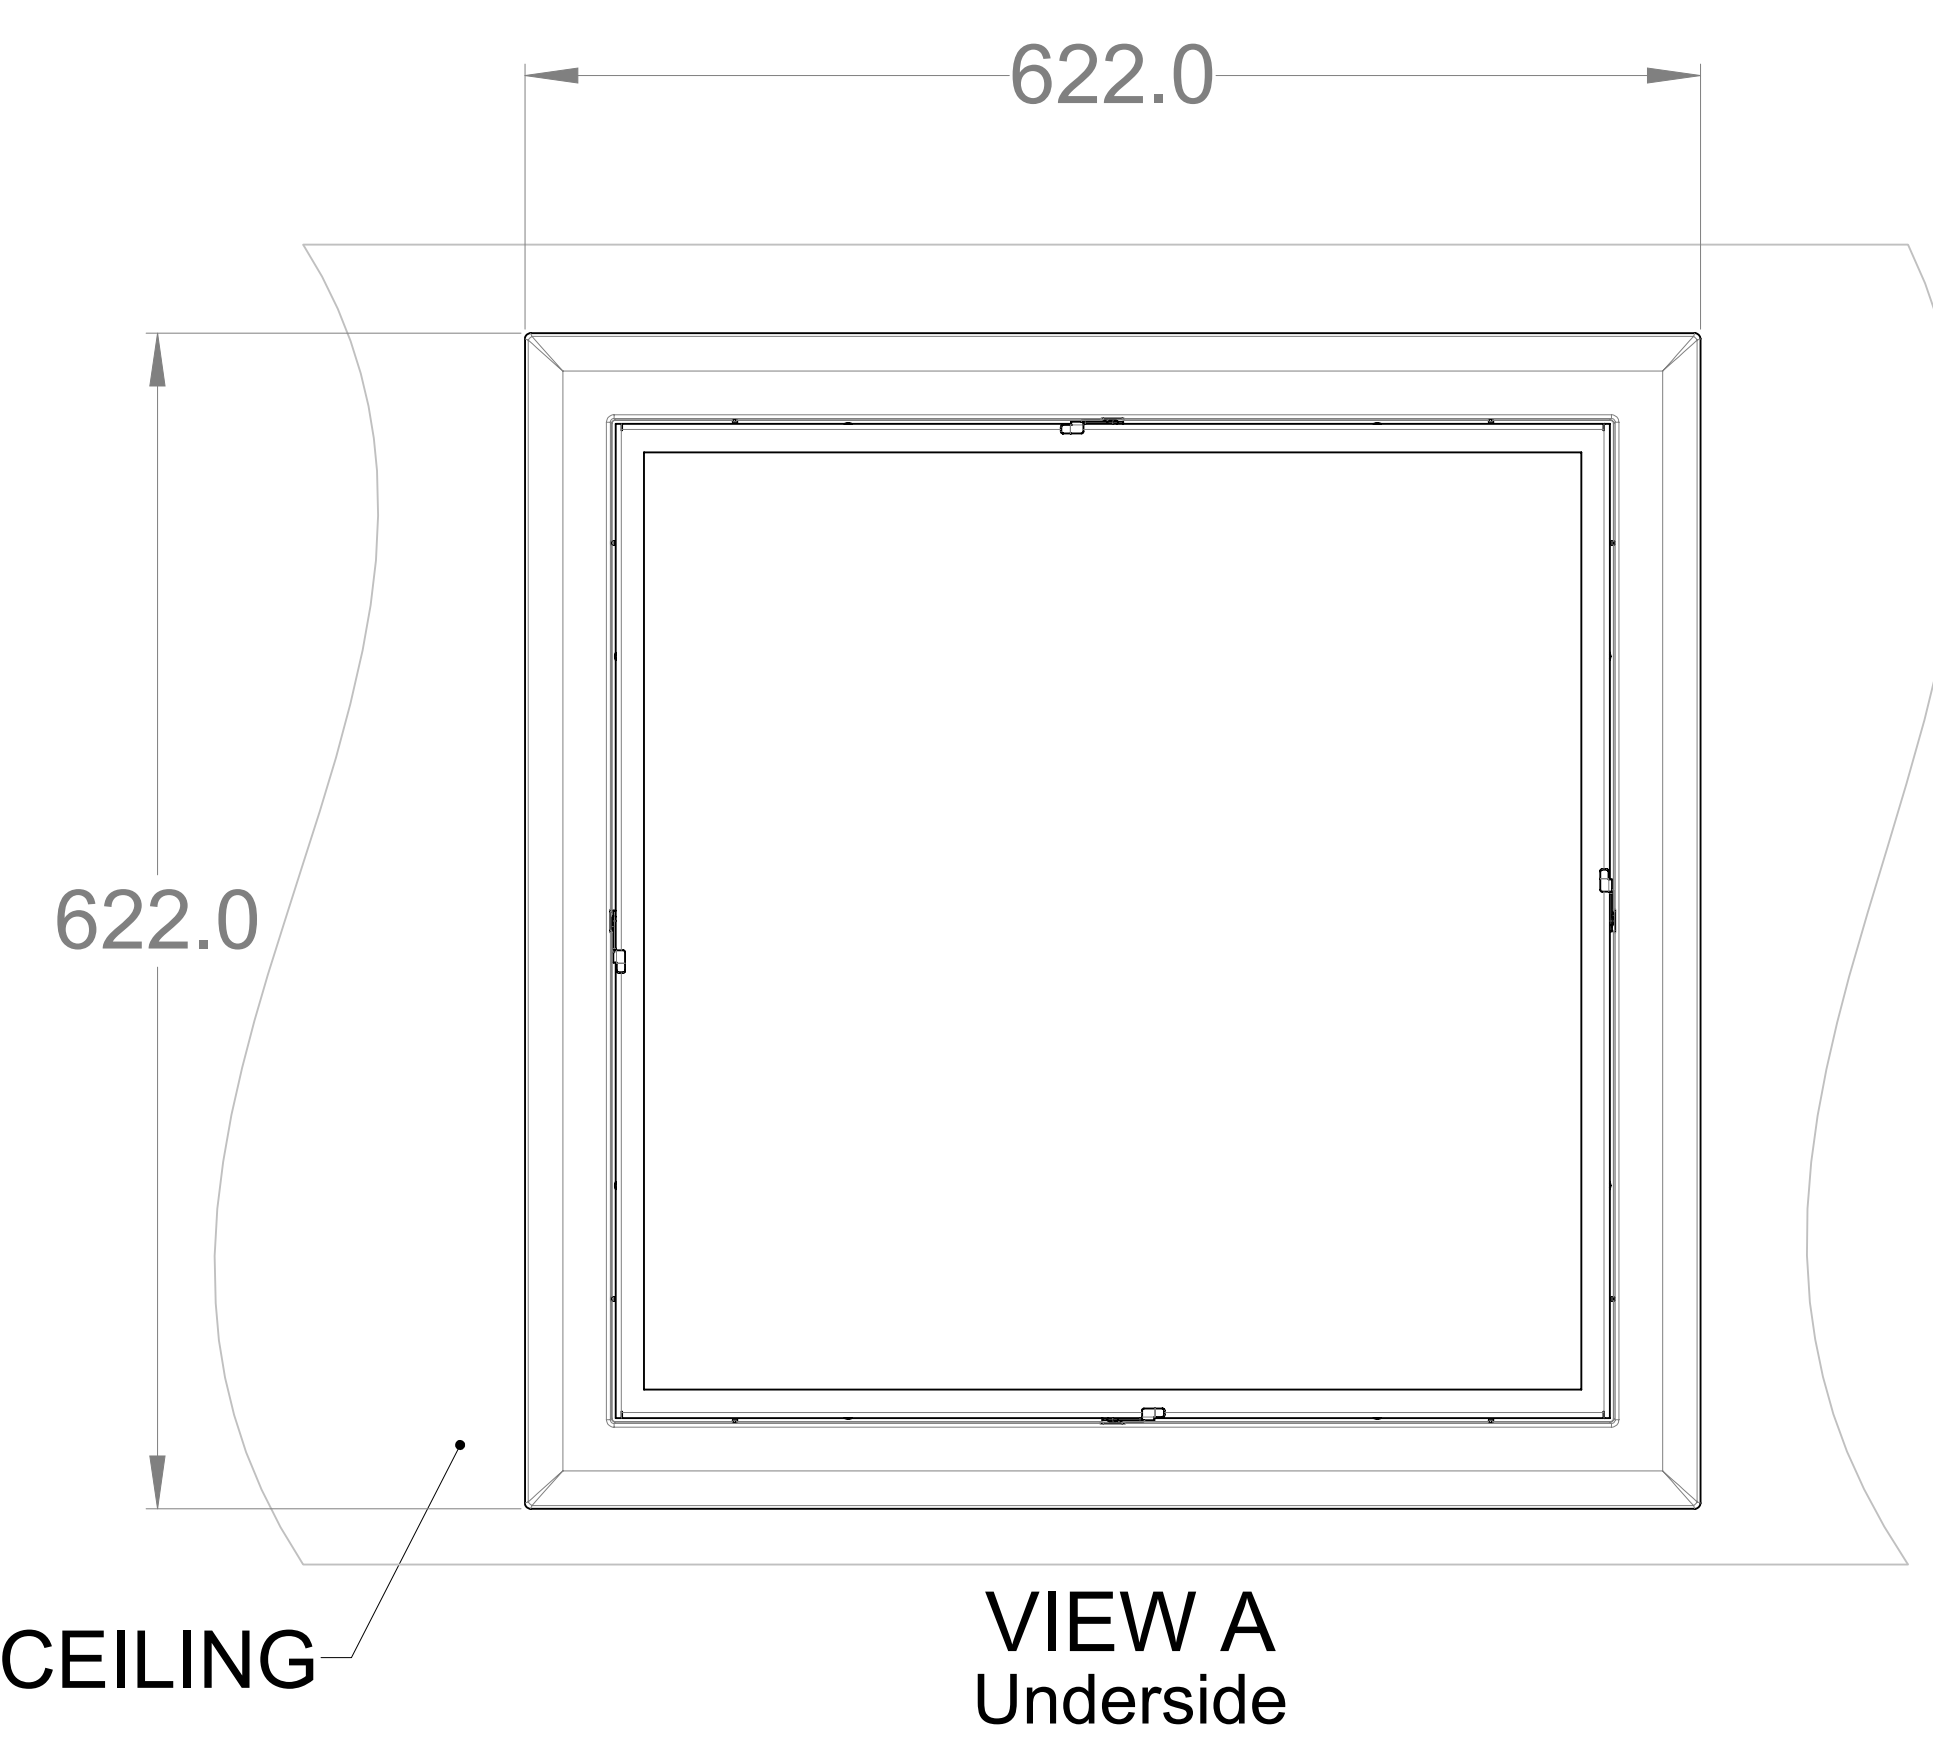


TEK SCREWS WITH SEAL
 HEX HEAD 12-14 X 25mm
 GALVANISED. 22 OFF
 BACK FLASH PAN
 SUPPLIED BY INSTALLERS
 UNIVERSAL METAL FLASHING
 K-FL55MU

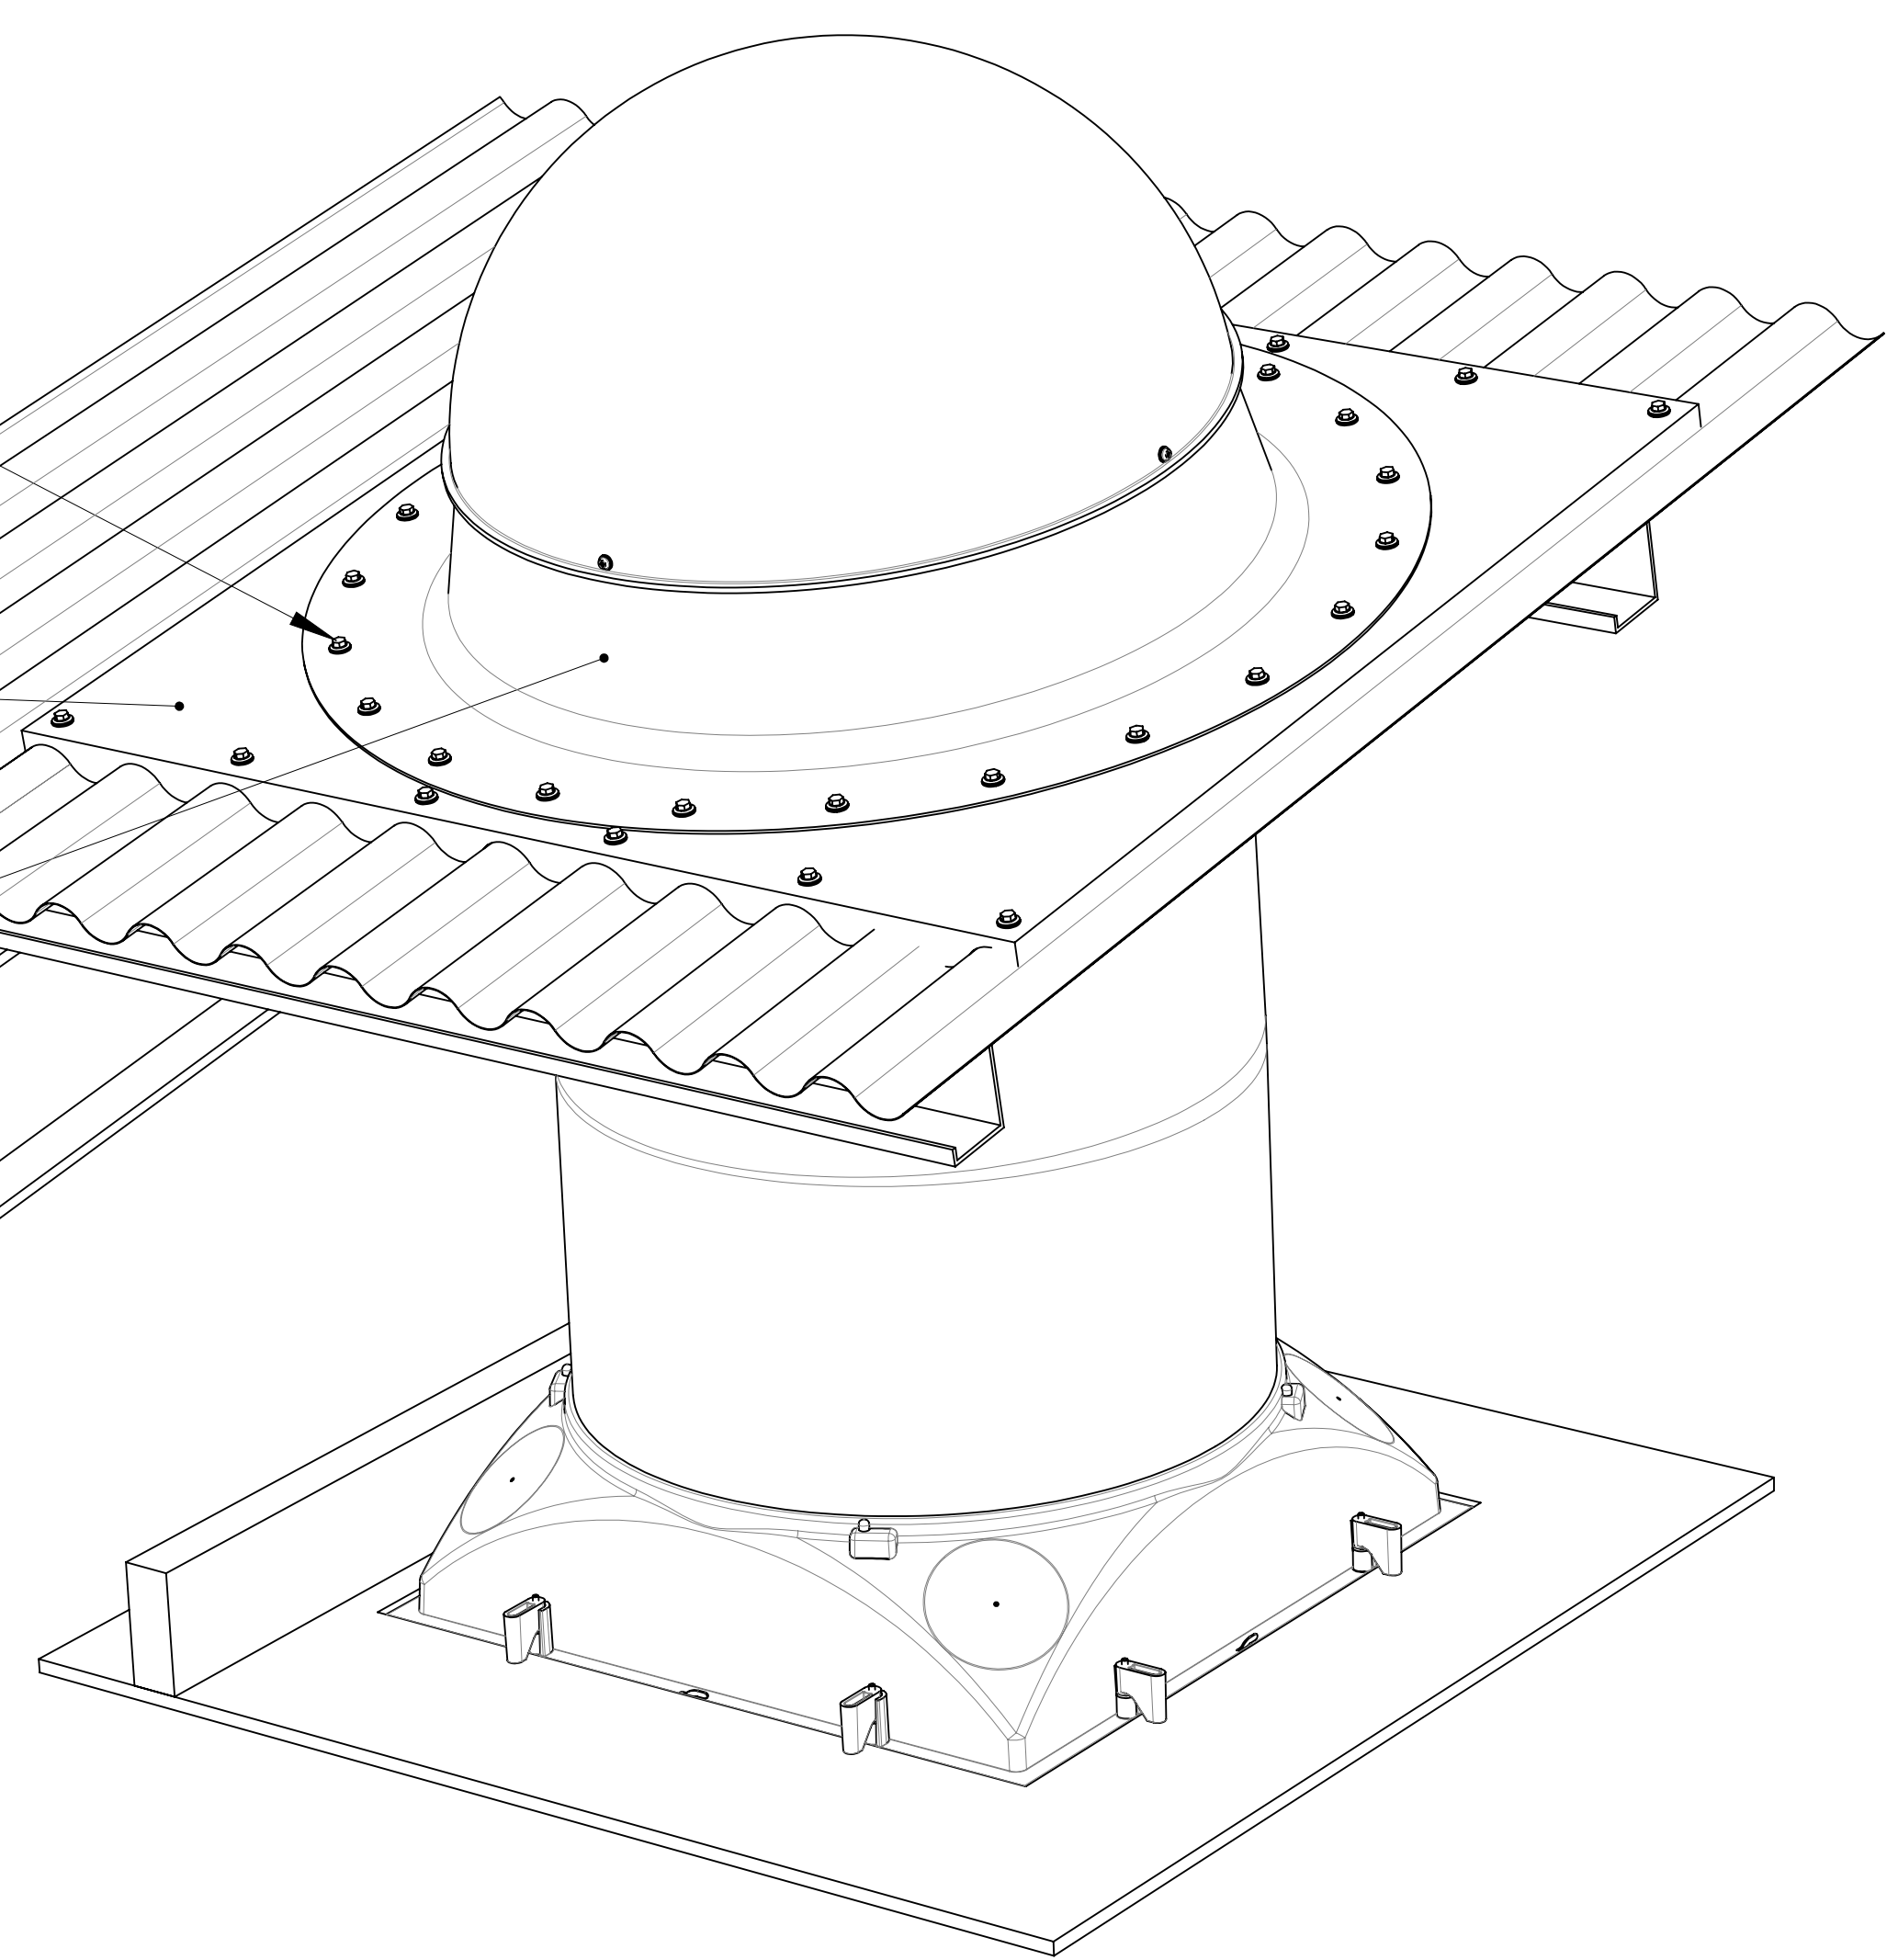

Components	Specs
Dome	4.5 mm High Impact Clear Acrylic.
MAXLIGHT 550 Flat - RoundFlashing	2 mm Aluminium
Top, Extension & Bottom tubes	0.5mm Aluminium with 98% reflectivity.
Transition Box	ABS designed to suit grid or gyprock ceiling with surrounding décor trim
Square Diffuser	Acrylic Lens assembled in square Aluminium Frame

NOTE
 1. STRUCTURAL ELEMENTS SHOWN FOR REFERENCE ONLY
 2. ALL DIMENSIONS IN METRIC MM

SOLAR BRIGHT AUSTRALIA PTY LTD
 11 Progress Circuit. Prestons. NSW. 2170 Australia.

ALL DIM IN MM DO NOT SCALE 3RD ANGLE PROJECTION AS1100 THIS PRINT Saturday, 1 July 2023 11:27:38 AM	SHEET SIZE	SHEET NUMBER	SHEET SCALE
THIS IS THE CONTROL DRAWING FOR THE CAD FILE: DRAWINGNAME-REVISION.EXTENSION	A0	1 / 1	NA
GENERAL TOLERANCES (UNLESS OTHERWISE STATED): X = ±1.000 XX = ±0.250	X,XX = ±0.025 (X) = REF. DIM.		

DRAWING NAME
MAXLIGHT 550 UNIVERSAL
 FOR GYPROCK / HARD CEILING
 REVISION
C

