

VIEW A
Underside



SOLAR PANEL SHOULD BE FREE OF SHADE
PITCHED AND FACING NORTH
(SOUTHERN HEMISPHERE)

SOLAR PANEL
INSIDE ROTATABLE CAP

UNIVERSAL METAL
FLASHING K-FL25MU

BACK FLASHING TO START
FROM UNDER THE RIDGE

BACK FLASH PAN
SUPPLIED BY INSTALLERS
MUST BE EXTENDED TO ROOF RIDGE

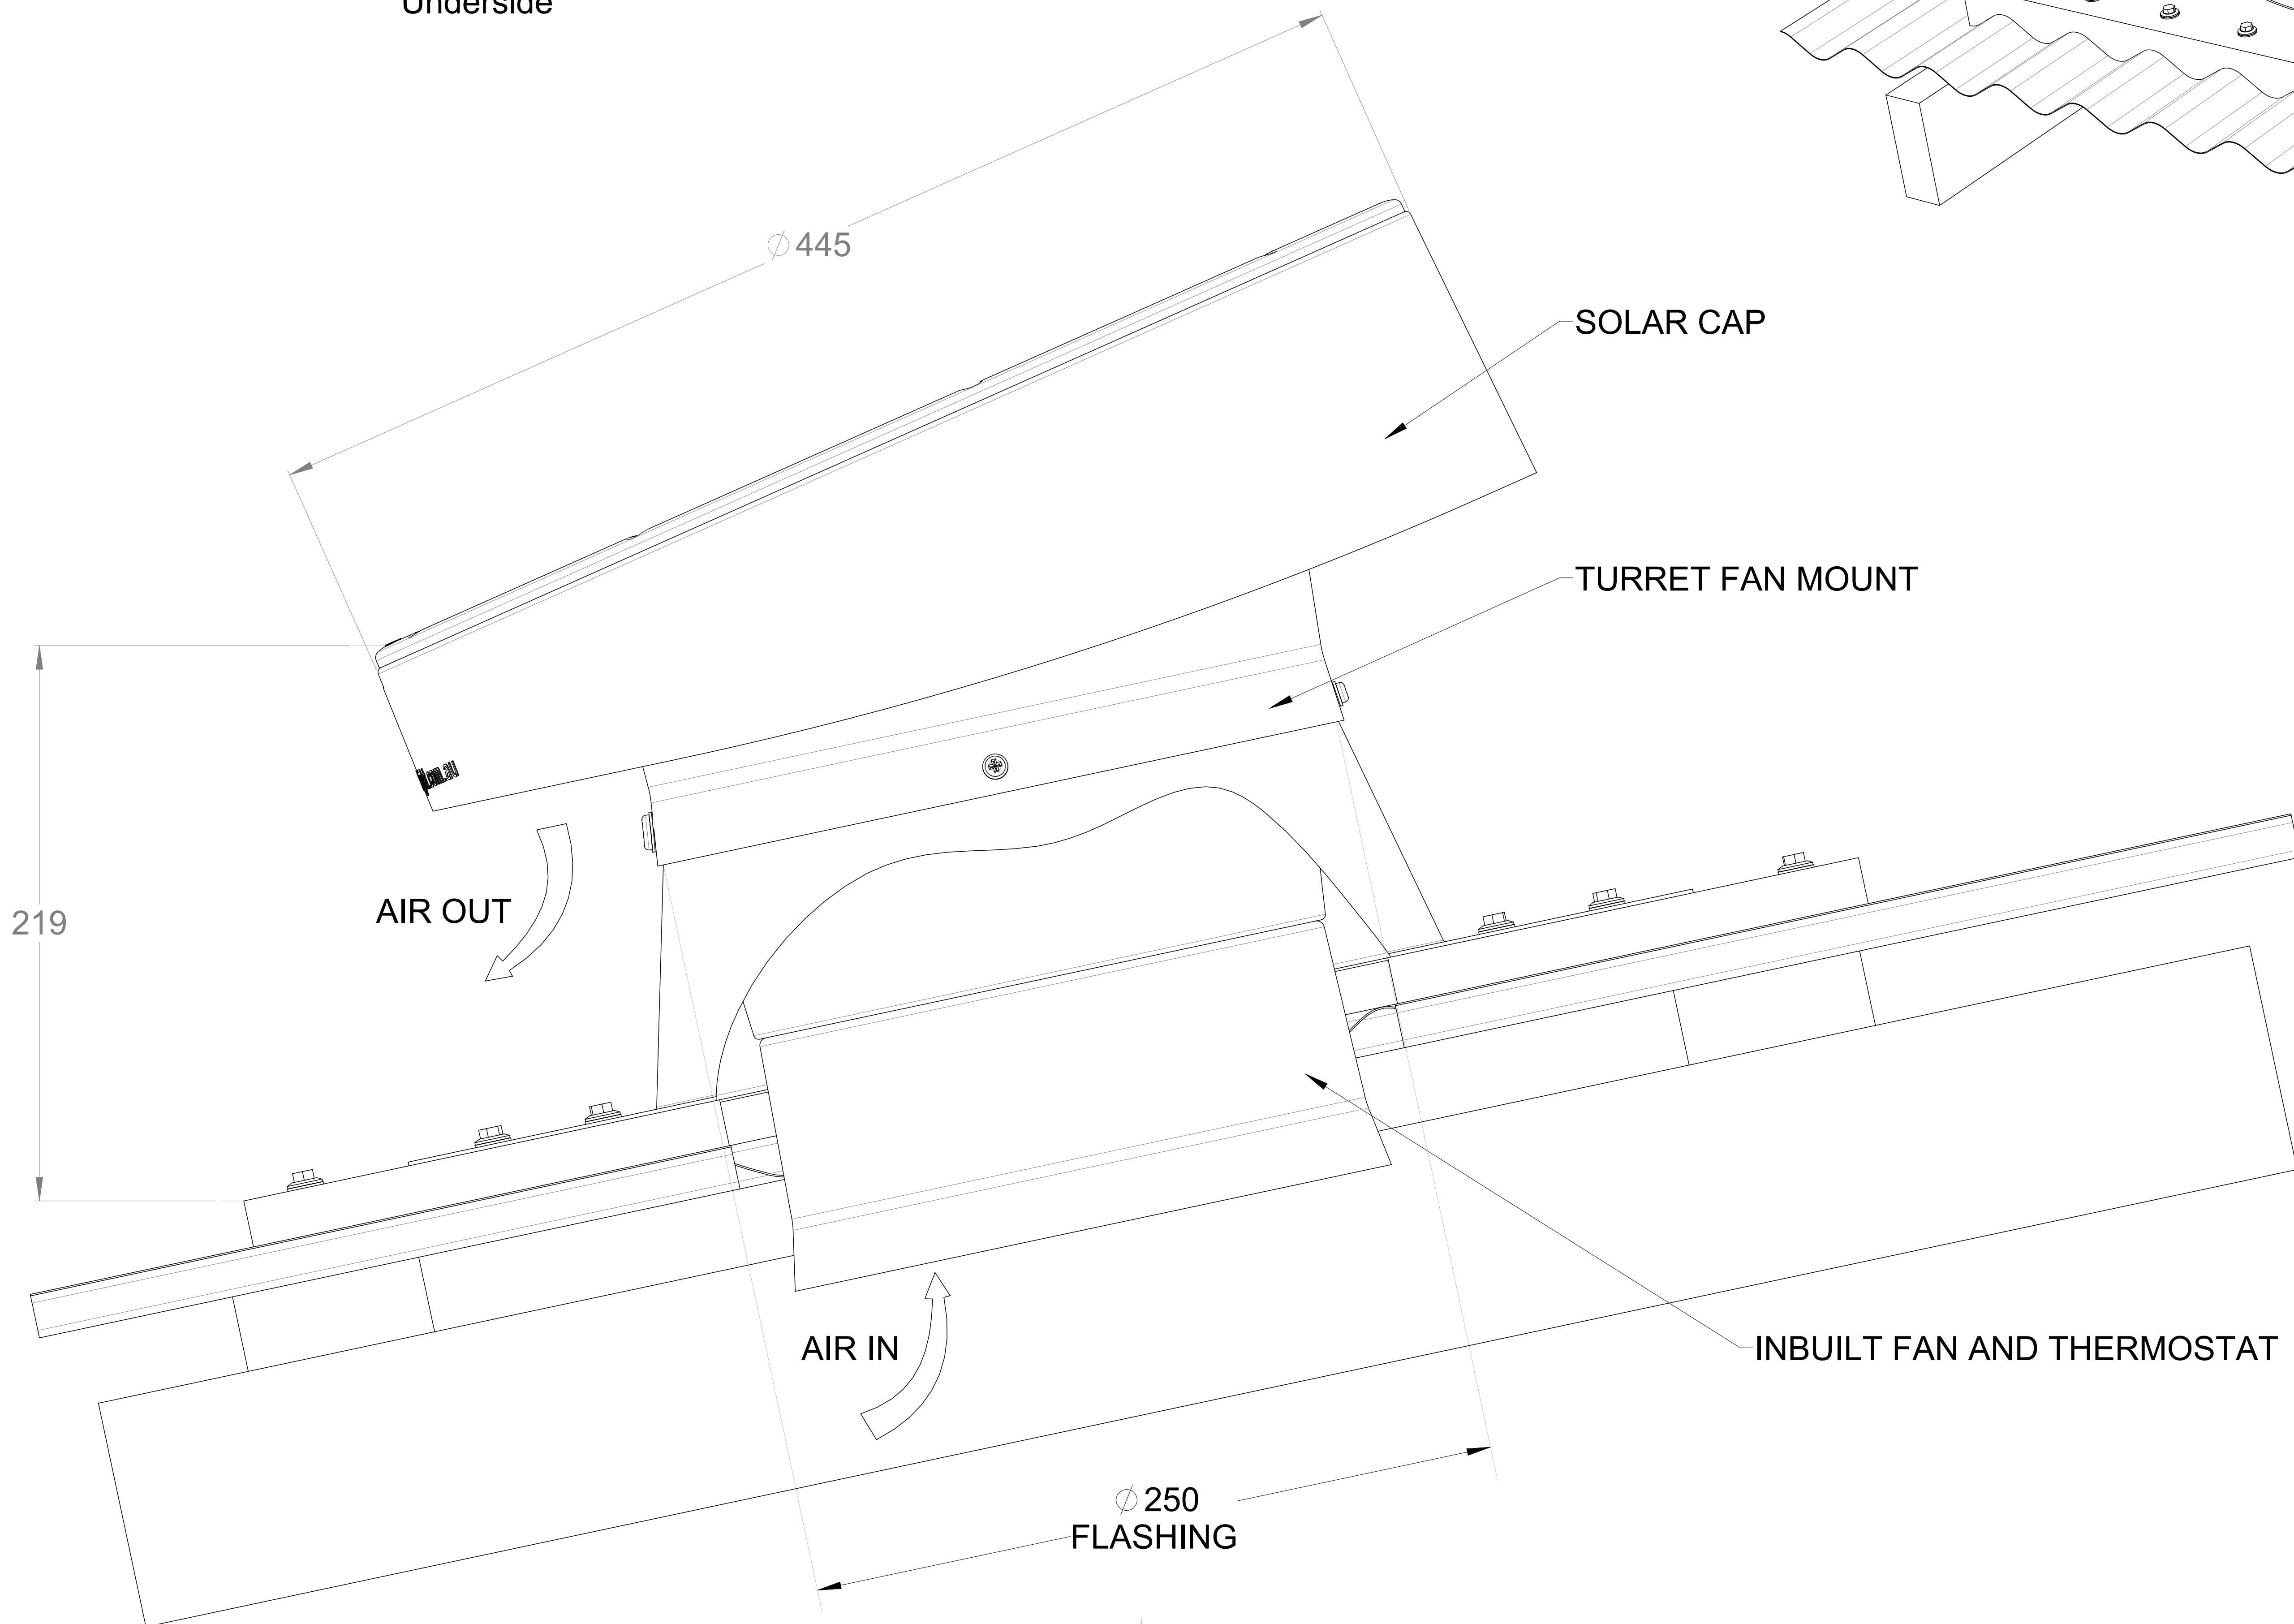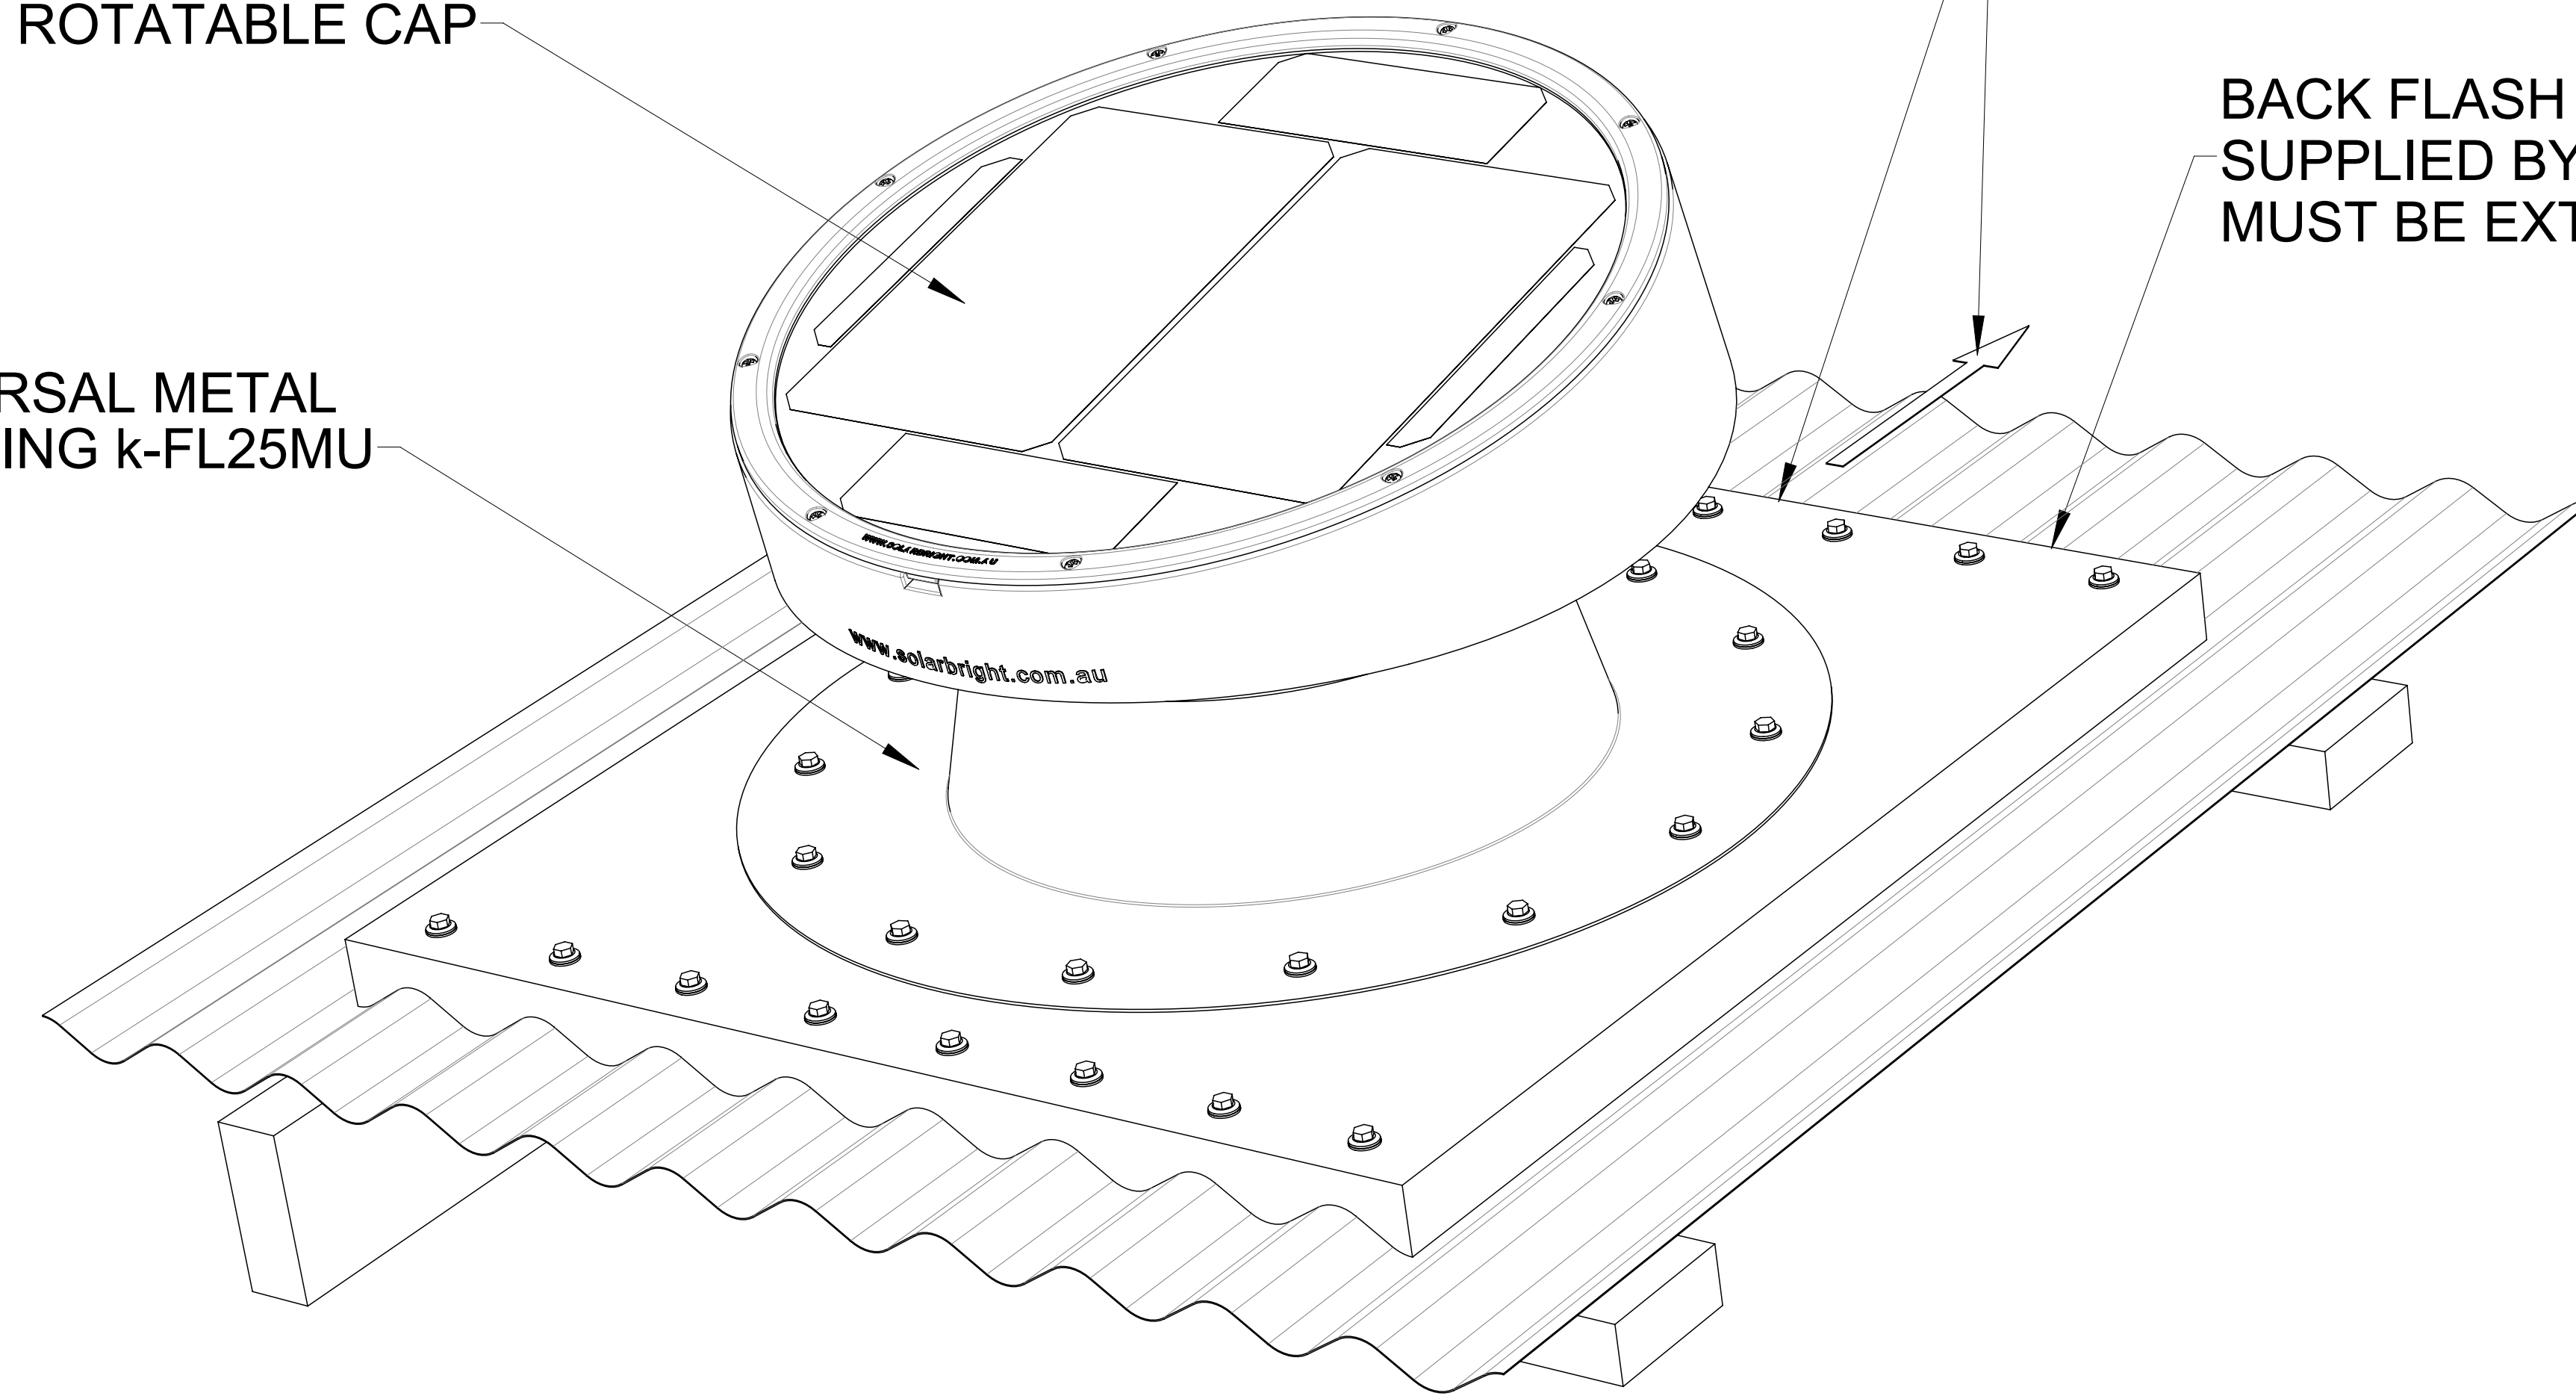

SOLAR CAP

TURRET FAN MOUNT

INBUILT FAN AND THERMOSTAT

Ø 445

219

AIR OUT

AIR IN

Ø 250
FLASHING

A

NOTES

1. STRUCTURAL ELEMENTS SHOWN FOR REFERENCE ONLY
2. ALL DIMENSIONS IN METRIC MM

SOLAR BRIGHT AUSTRALIA PTY LTD

11 Progress Circuit. Prestons. NSW. 2170 Australia.

ALL DIM IN MM DO NOT SCALE 3RD ANGLE PROJECTION AS1100 THIS PRINT Saturday, 19 August 2023 3:01:53 PM

THIS IS THE CONTROL DRAWING FOR THE CAD FILE:
DRAWINGNAME-REVISION.EXTENSION

SHEET SIZE SHEET NUMBER SHEET SCALE

GENERAL TOLERANCES
(UNLESS OTHERWISE STATED): X = ±1.000 X.XX = ±0.025
X.X = ±0.250 (X) = REF. DIM.

A0 1 / 1 NA

DRAWING NAME

REVISION

MAXBREEZE 250mm - METAL UNIVERSAL

B

