



Mono X™

LG250S1C

Clean power from the Australian sun with LG's Mono X™ modules.

The Mono X™ benefits from LG's years of research and development and our commitment to long lasting products of high quality.

Our Mono X™ will provide decades of clean, reliable energy. Choosing LG's state-of-the-art Mono X™ is an investment in superior standards of design, manufacture, back up support and warranties.




Long Lasting Warranties

The Mono X™ support warranties include a 10 year product warranty and a linear 25 year output warranty. The linear output warranty guarantees a minimum power output of 80.2% after 25 years. Because it's LG – these top class warranties give you peace of mind.



Designed for Durability

LG solar modules are designed with durable glass to be light in weight while also being able to withstand heavy loads up to 5400 Pa, again top of the line quality.



Positive Power Tolerance

LG provides rigorous quality testing to all solar modules to ensure the rated power output. Our Mono X™ modules have a positive nominal tolerance starting at 0% and going as high as +3%.



Highest Testing Standards

After a rigorous process, LG's product durability testing laboratory has earned certification from both TÜV Rheinland and UL (Underwriters Laboratories), a first in the solar industry.



LG Sign-Off on Every Cell

LG is proud to sign-off on every single manufactured solar cell with our LG brand. The LG logo reflects cutting edge technology and durability standards which have guided LG for over 50 years.



Reliable for the future

LG's world class research in chemicals, energy storage and electrical equipment have contributed to developing a solar product that is reliable and long lasting.

Mono X™

LG250S1C

Mechanical Properties

Cells	6 x 10
Cell vendor	LG
Cell type	Monocrystalline
Cell dimensions	156 x 156 mm ²
# of busbar	3
Dimensions (L x W x H)	1632 x 986 x 42 mm
Maximum load (Pa)	5400
Weight	18.4 kg
Connector type	MC4 connector IP67
Junction box	IP 65 with 3 bypass diodes
Length of cables	2 x 1000 mm

Certifications and Warranty

Certifications	IEC 61215 Ed.2, IEC 61730, UL 1703 IEC 62716/Draft C, IEC 61701
Product warranty	10 years
Output warranty of Pmax	Linear Warranty 1) 1st year: 97% 2) After 2nd year: 0.7% annual degradation 3) 80.2% after 25 years.

Electrical Properties (STC*)

	LG250S1C
Maximum power at STC (Pmax)	250
MPP voltage (Vmpp)	29.9
MPP current (Impp)	8.37
Open circuit voltage (Voc)	37.1
Short circuit current (Isc)	8.76
Module efficiency (%)	15.5
Operating temperature (°C)	-40 ~ +90
Maximum system voltage (V)	1000
Maximum series fuse rating (A)	15
Power tolerance (%)	0 ~ +3



* STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5

* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.



Temperature Coefficients

NOCT	46.0 ± 2 °C
Pmpp	-0.420 %/K
Voc	-0.306 %/K
Isc	0.042 %/K

Characteristic Curves

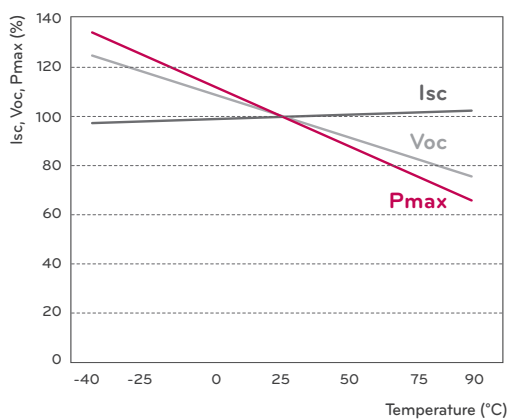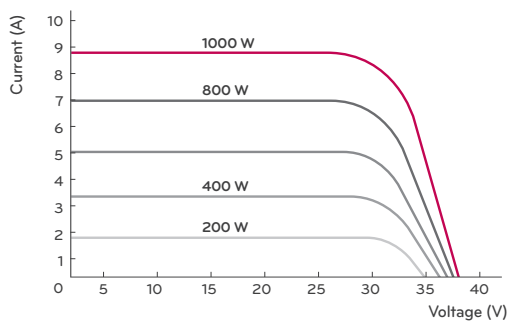

Dimensions (mm)

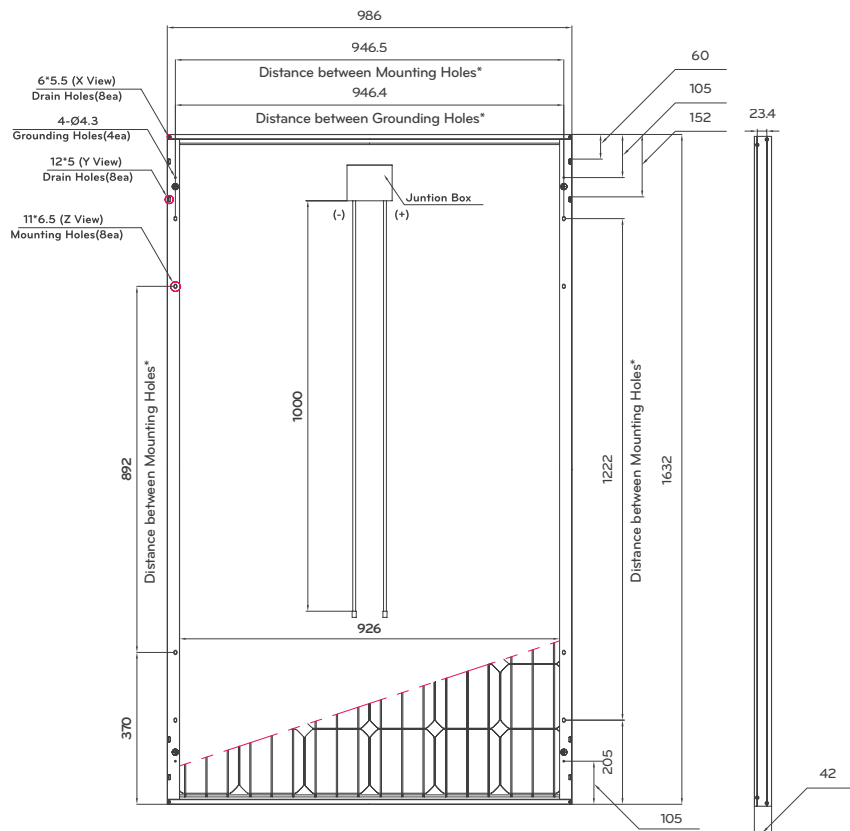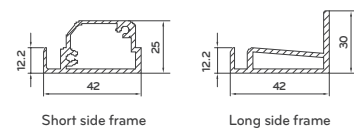

* The distance between the center of the mounting/grounding holes



LG Electronics Australia Pty Ltd
Solar Business Team
2 Wonderland Drive, Eastern Creek, NSW 2766
Ph: 1300 LG CARE (1300 54 2273)
Email: solar.sales@lge.com.au
Web: www.lg-solar.com

Product specifications are subject to change without notice.
LG, LG logo, and Life's Good are trademarks of LG Electronics, Inc. worldwide.
Trademarks and intellectual properties LG Electronics, Inc. are protected by international copyright laws

Copyright © 2012 LG Electronics. All rights reserved.

0.315-11