

DOME D0-40RC
3.6mm HIGH IMPACT ACRYLIC

BONDED EDPM
WASHER 4OFF

PHILIPS PAN HEAD
STAINLESS 8-18 X 20
4 OFF

FOAM SEAL
6.9mm WIDE

UNIVERSAL METAL FLASHING
K-FL40MU

DETAIL B
SCALE 2 : 1



GYPROCK CEILING
VIEW A
Underside

INSULATED FOIL SEAL

CEILING RING
20418-0001

FIXTURE HOOK
20423-0001

URETHANE SEAL

SEAL E113


TOP LENS
20420-0001

CLEAR LENS

DETAIL C
SCALE 2 : 1

DECOR TRIM
20419-0001

PATTERNED DIFFUSER
20421-0001

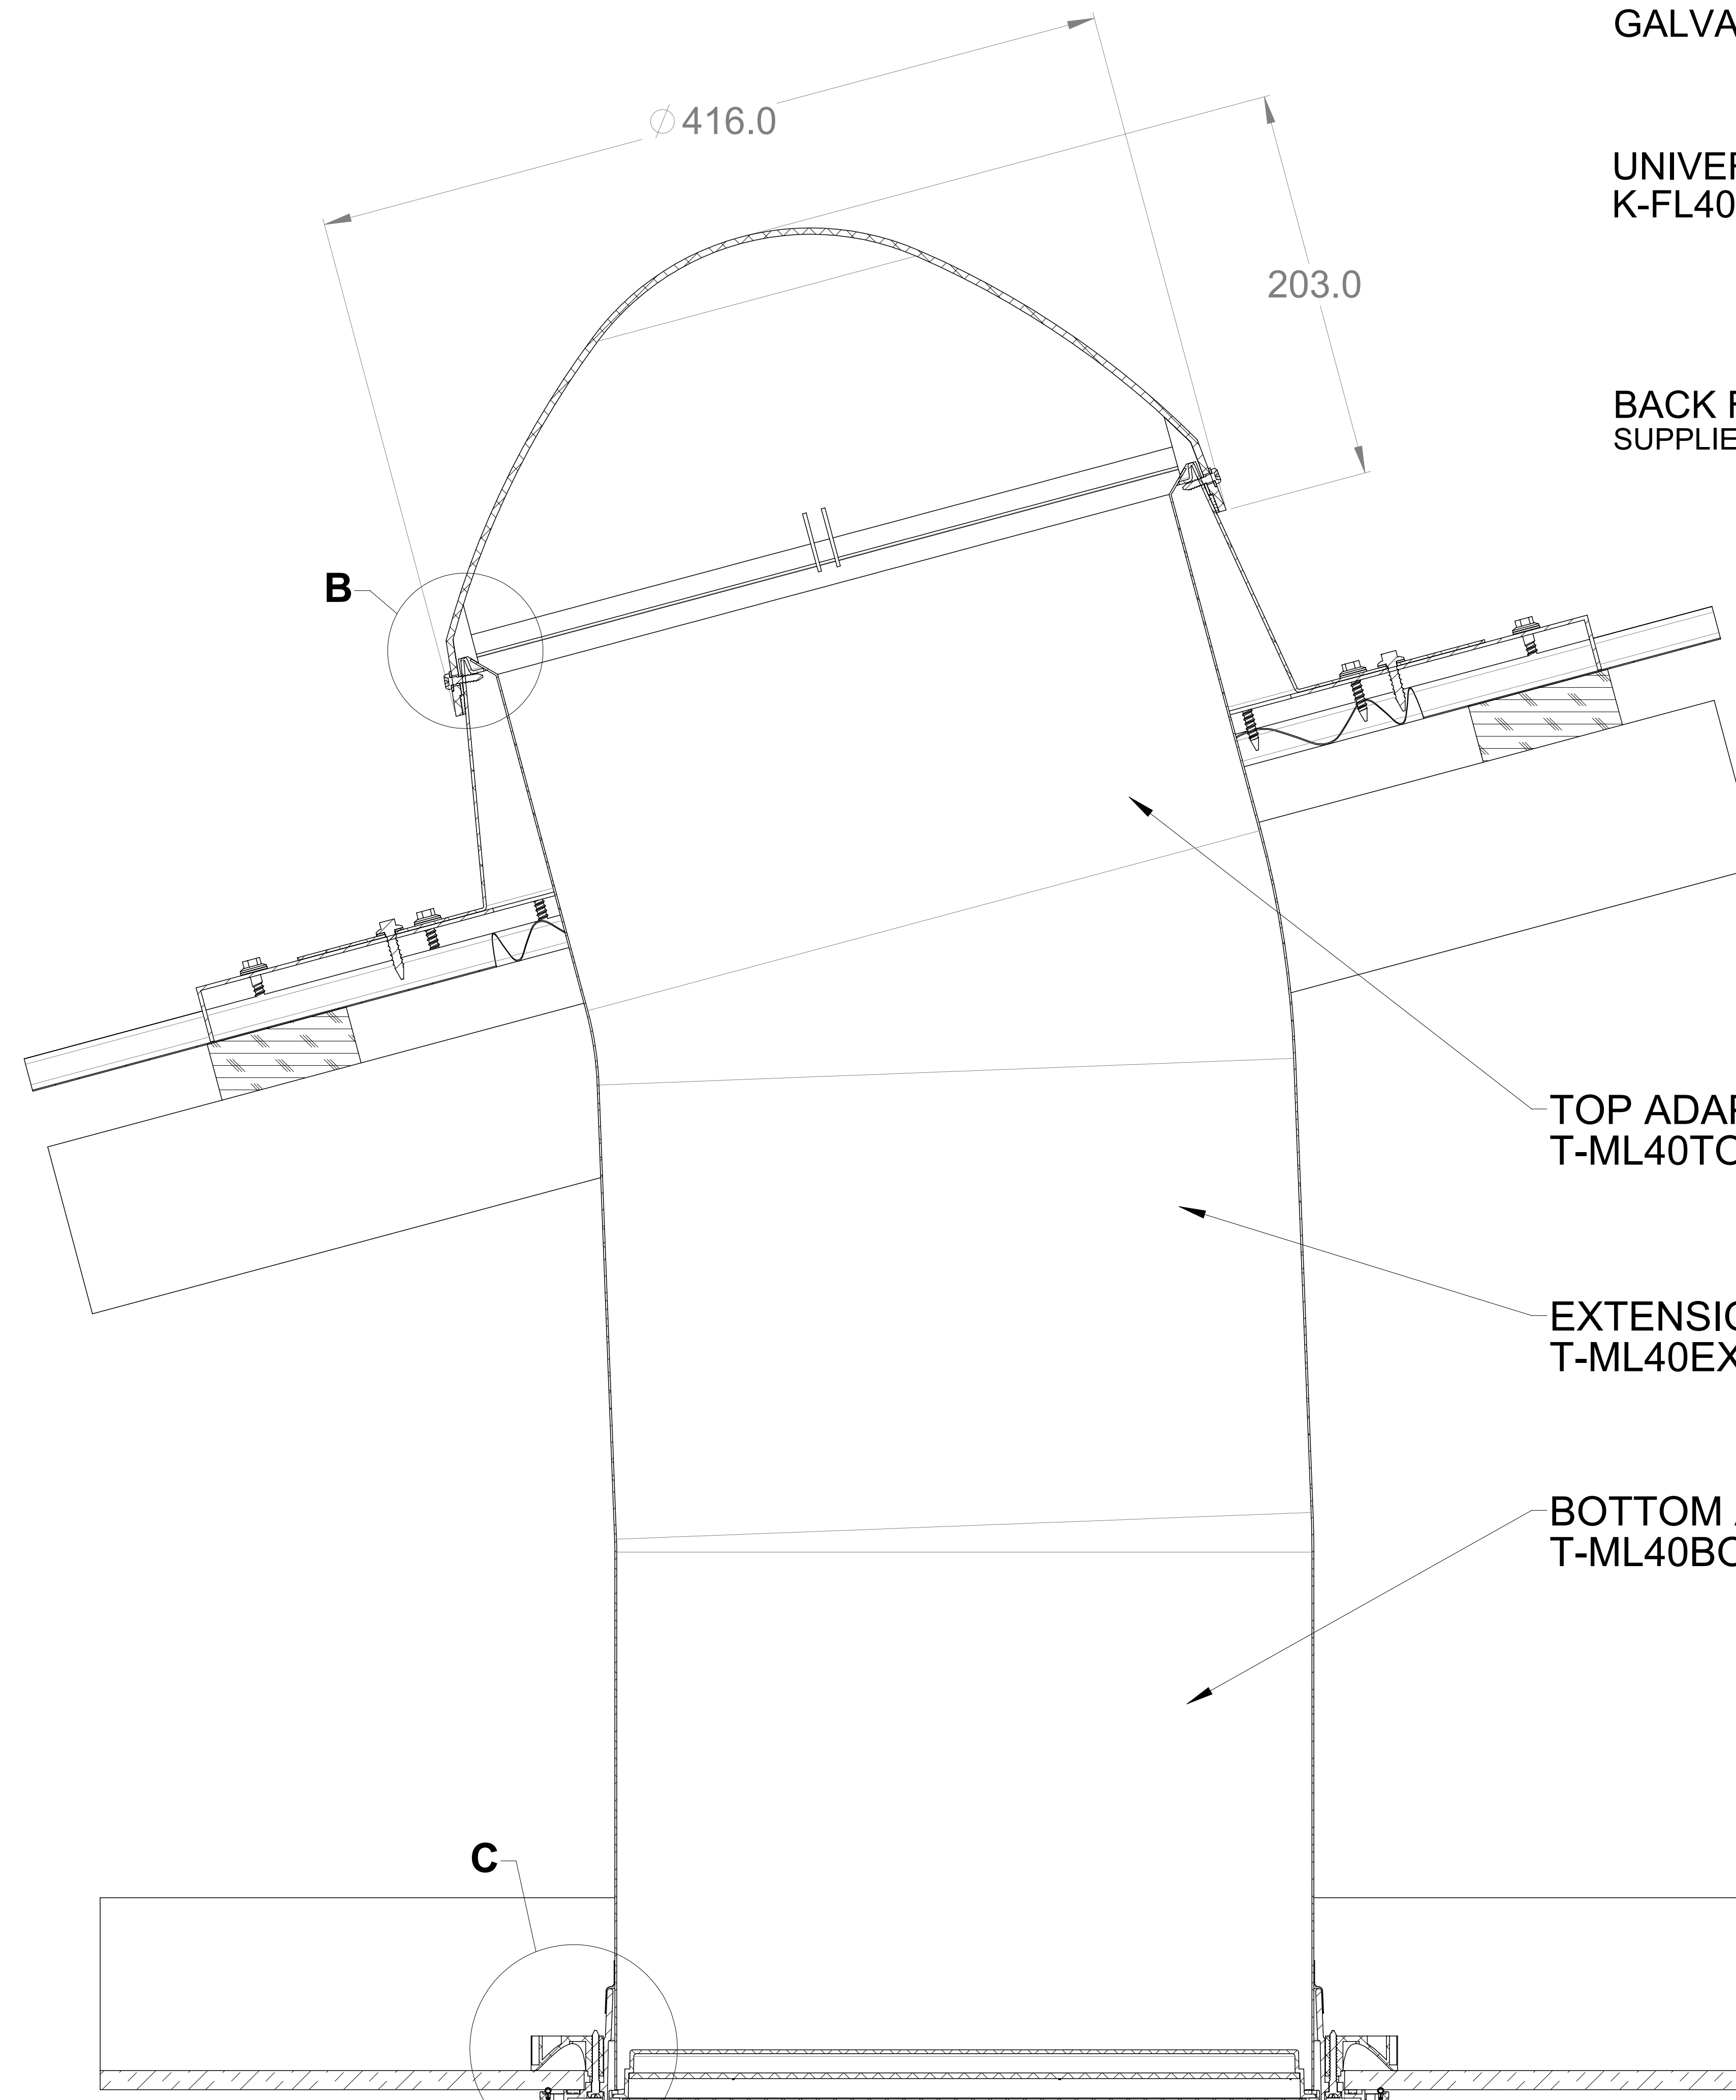

SECTION
SCALE 1 : 2

Ø 400.0
CEILING CUT OUT

Ø 442.0

A

TEK SCREWS WITH SEAL
HEX HEAD 12-14 X 25
GALVANISED 16 OFF

UNIVERSAL METAL FLASHING
K-FL40MU

BACK FLASH PAN
SUPPLIED BY INSTALLERS

TOP ADAPTOR
T-ML40TOP

EXTENSION TUBE
T-ML40EXT4 OR EXT6

BOTTOM ADAPTOR
T-ML40BOT

Components	Specs
Dome	3.6 mm High Impact Clear Acrylic.
Top, Extension & Bottom tubes	0.5mm Aluminium with 98% reflectivity.
Diffuser Kit	Acrylic Lens in Decor Trim
Maxlight 400 Universal Roof Flashing	Zincalume

NOTES
1. STRUCTURAL ELEMENTS SHOWN FOR REFERENCE ONLY
2. ALL DIMENSIONS IN METRIC MM

SOLAR BRIGHT AUSTRALIA PTY LTD
11 Progress Circuit. Prestons. NSW. 2170 Australia.

ALL DIM IN MM DO NOT SCALE 3RD ANGLE PROJECTION AS1100 THIS PRINT Thursday, 29 June 2023 9:03:11 PM	DRAWINGNAME-REVISION.EXTENSION	SHEET SIZE	SHEET NUMBER	SHEET SCALE
GENERAL TOLERANCES (UNLESS OTHERWISE STATED): X = ±1.000 XX = ±0.250	X,XXX = ±0.025 (X) = REF. DIM.	A0	1 / 1	NA
DRAWING NAME				REVISION

MAXLIGHT 400 UNIVERSAL
FOR GYPROCK - HARD CEILING

B

